



Biological carrier media For waste water treatment

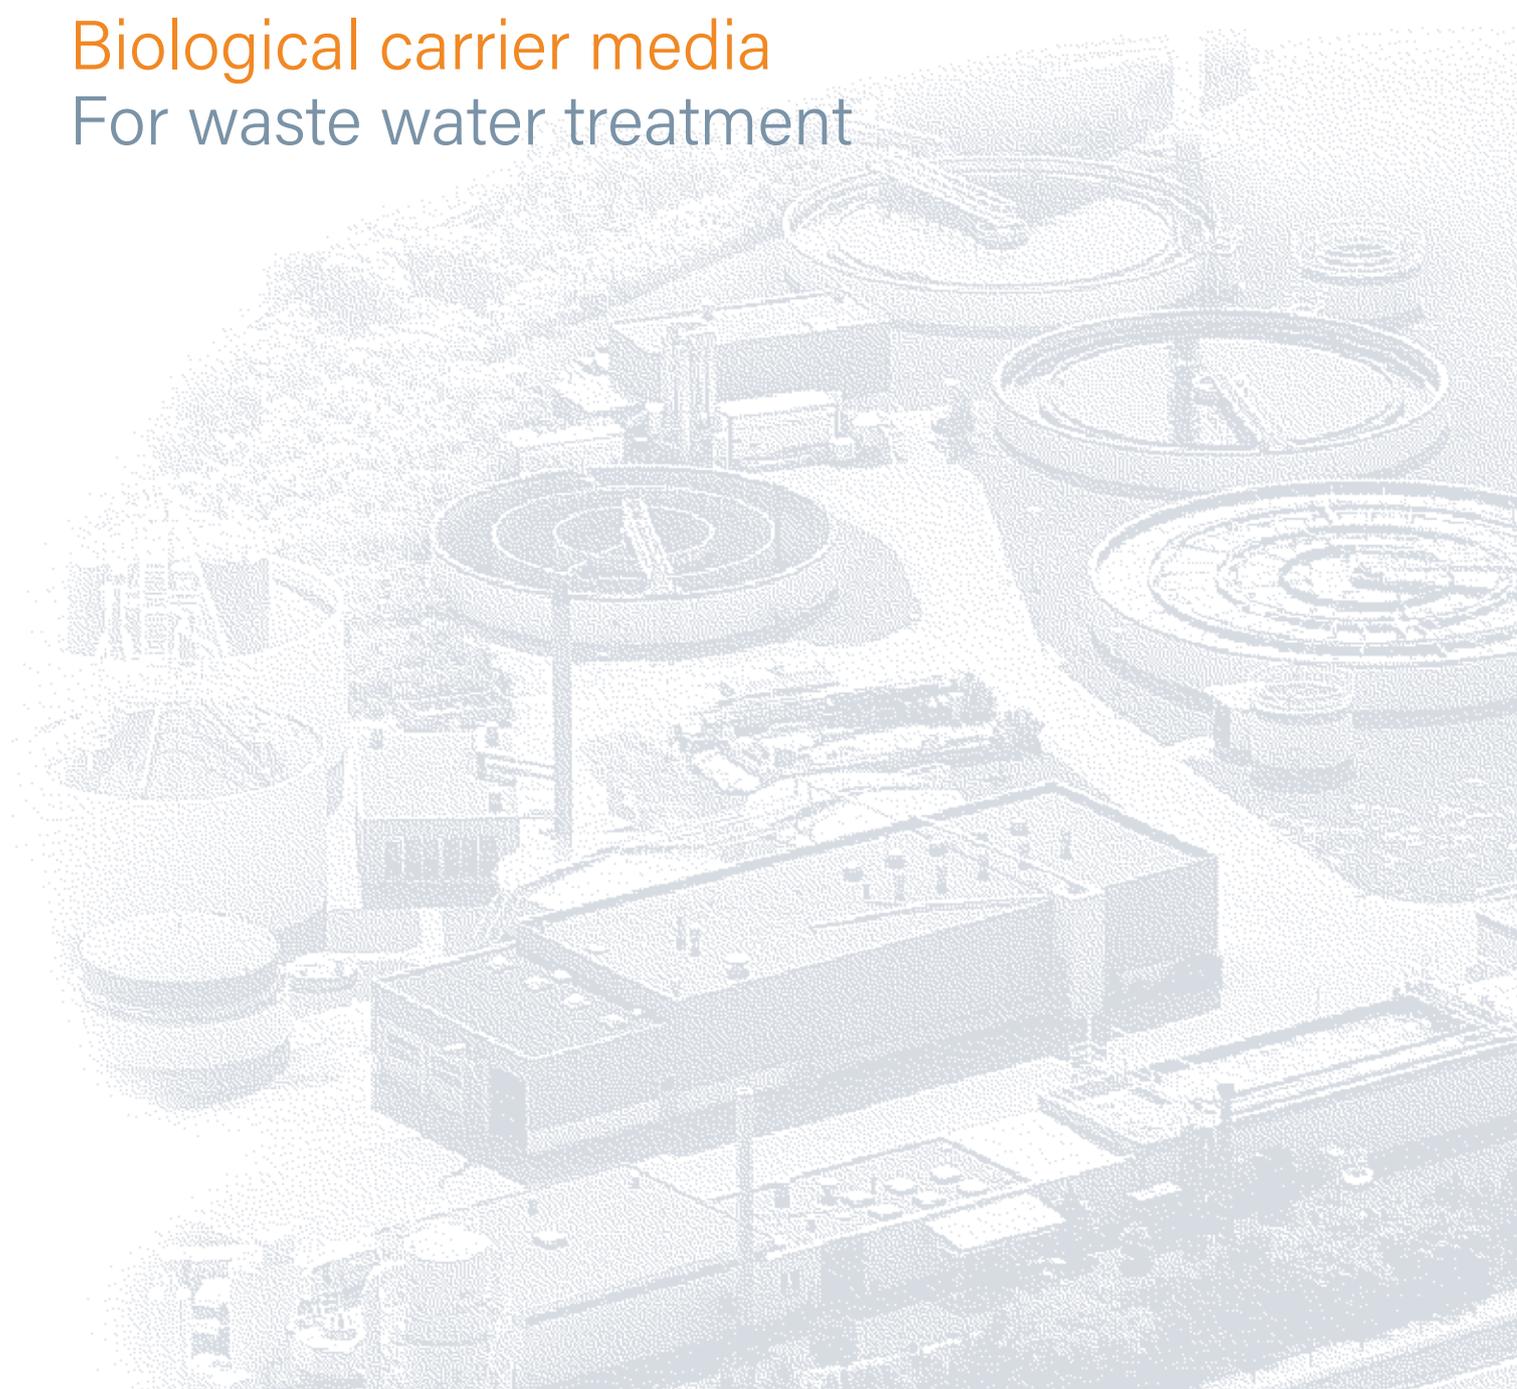

Biological carrier media For waste water treatment

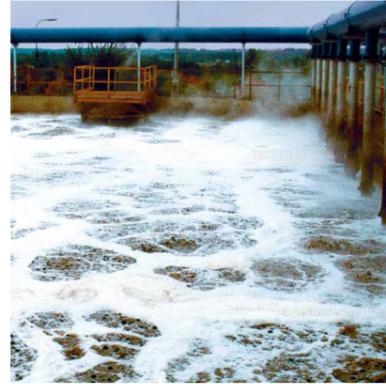

An effective waste water treatment facility is an essential premise for ensuring a clean environment. One of the main process steps in a waste water treatment plant involves the degradation of organics by micro-organisms. Just as any living creature these micro-organisms need oxygen to survive. This oxygen is most commonly inserted by air injection directly into the waste water. The process can be improved by adding solid surfaces to the water container. These surfaces give the micro-organisms a place to grow up and their residence time is longer than the one of the water. RVT Process Equipment is delivering the optimum carriers for this application.

No matter whether the process requires biological carrying media for trickling filters, random or suspended beds, all of the following requirements must be fulfilled:

- High specific surface area
- Good permeability of the waste water
- Optimum size and configuration in respect of price and durability
- Suitable to be cleaned by water flowing through
- Non toxic material to ensure the life of the micro-organisms

Carriers for suspended beds

The biological carrying media used in MBBR (Moving Bed Biofilm Reactor) are continuously in motion caused by air injection and recirculating water. The specific density of the carrier media can be adjusted from 0.95 to 1.15 g/cm³, depending on customers' demand. However it has to be considered that the actual density of the carrying media will increase as the biofilm develops on the media surface.

The advantage of the MBBR in comparison to the trickling filters and submerged fixed beds is that it maintains a thinner layer of




biofilm on the carrier media which will allow higher specific surfaces. Therefore it is permissible to have smaller reactor sizes which will turn into smaller investment costs while maintaining the necessary degradation of the organic load.

The **Bioflow 9** with its filigree structure shows a very high specific surface area of 800 m²/m³. It is mostly used for waste water with low organic load. An example of this might be the waste water of fish farming.

In case the organic load is still higher the **Bioflow 40** will be the right choice. As its size and thus its weight per piece too is higher than that of the type 9 it was necessary to take care of the mechanical abrasion. Due to the drumlike shape the wear resistance is at a high level.

Carriers for trickling filters and submerged fixed beds

These carriers are available both as structured blocks and as random carriers each of which ensuring the flow of water in all directions. When selecting a carrier next to the weight of itself the organic load must also be taken into calculation. For a high organic load a carrier with a more open structure might be appropriate while for low organic loads a carrier with high surface area might be required.

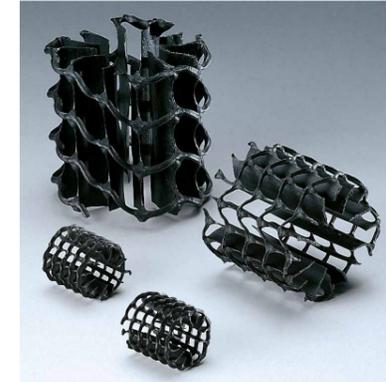

The Bioflow suspended bed filters from RVT Process Equipment at a glance

Type	specific surface area m ² /m ³	bulk density kg/m ³	dimensions d x h in mm
Bioflow 9	800	145	9 x 7
Bioflow 35	870	98	35 x 5
Bioflow 40	305	92	40 / 45 x 35

Figures include a tolerance of +/- 5% due to manufacturing

Materials:

PE/PP recycled

PE, black and virgin

The Bioflow 9 is only available in PE virgin, density is not variable

Carriers for trickling filters and submerged bed filters at a glance

Random packings

Type	specific surface area m ² /m ³	weight kg / m ³
RFK 25L	312	71
RFK 38L	188	47
RFK 50L	148	51
RFK 65L	102	38
RFK 75L	78	36
RFK 15S	437	118
RFK 15SL	602	125
RFK 65S	96	43
RFK 75S	84	41

Materials: PE, black and nature

Structured blocks

Type	block dimensions l x w x h in mm	specific surface area m ² / m ³	weight kg/m ³
RFK 25B	500 x 500 x 500	380	92
RFK 38B	500 x 500 x 500	262	68
RFK 50B	500 x 500 x 600	180	63
RFK 65B	500 x 500 x 600	135	52
RFK 75B	500 x 500 x 600	110	51

Materials: PE, black

The values indicated above apply for a ratio of diameter of vessel to carriers of D/d >= 20. All information presented here is believed to be accurate and reliable but does not constitute a warranty or performance guarantee on part of RVT Process Equipment GmbH.

The way to RVT Process Equipment




Tower packings for mass and heat transfer



Structured packings for mass and heat transfer



Column internals



Mass transfer trays



Biological carrier media



Turn-key units for waste gas scrubbing



Ammonia recovery processes



Combustion plants for the disposal of exhaust air, waste gases and liquid media



Our addresses

RVT Process Equipment GmbH
Im Gries 15
96364 Marktrodach
Germany

Phone +49 (0) 9261 55235-0
E-mail info@rvtpe.de

RVT Process Equipment, Inc.
9047 Executive Park Drive
Suite 222
Knoxville, TN 37923, USA

Phone +1 (865) 694-2089
E-mail info@rvtpe.net

Kunshan
RVT Process Equipment Co., Ltd
No. 66 - 68, Shaojing Road
Development Zone Kunshan
Kunshan, Jiangsu 215300
P.R. China

Phone +86 (512) 55 18 82 52
E-mail postmaster@chinarvtpe.cn